

RUBBER MAGNETIC SHEETS

Gidke-AG signage gauge, Magnetic Sheets are produced with a calendering process and have a smooth surface with a steady magnetic power.

The material is designed specifically for the print, promotion and display industries and can be printed directly on with any digital press using solvent, eco-solvent or UV inks. They can also be printed on with traditional silk screen.


The UV laminated rubber magnetic material is manufactured at thicknesses of 0.6mm - 0.9mm with a layer of 0.1mm printable white PVC layer and can also be optionally supplied in A4 sheets with a 0.26mm and 0.3mm inkjet paper coating for use with desktop printers.

The PET steel film is a direct printable magnetic film with exceptionally high-quality printing results. It is the widest and thinnest most flexible magnet, ideal for vast indoor & outdoor graphics, HP Latex certified, suitable for Solvent, Eco-solvent and UV printing.

APPLICATIONS

- Fast and simple changeover of shop advertising
- Pricing and product information on shelving
- Brand logos & advertising on the sides of cars
- Signalling on commercial & public transport vehicles



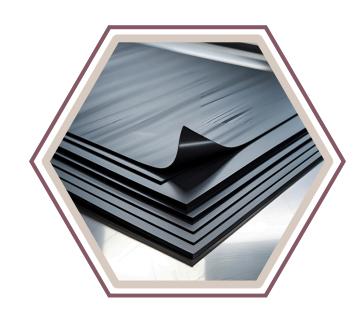

PET Steel Film

Product ID	Thickness (mm)	Size (meters)	Comments
CGNM018SOL	0.18 (+/- 0.02)	0.914/1.07/1.27/ 1.37/1.524/1.626 x 30/50	White Matt
CGNM017UV	0.17 (+/- 0.02)	0.914/1.07/1.27/ 1.37/1.524/1.626 x 30/50	White Matt

PET Magnetic Sheets

Product ID	Thickness (mm)	Size (meters)	Comments
CGMPM03SOL/UV	0.03 (+/- 0.02)	1.27/1.37/1.524 x 30	White Matt

Wall Mag-Isotropic Flexible

Product ID	Thickness (mm)	Size (meters)	Comments
CGMAG05-SAV	0.5	0.61 x 30	With Self-Adhesive & UV coating
CGMAG07-SAV	0.7	0.61 x 30	With Self-Adhesive & UV coating

info@gidke-ag.com www.gidke-ag.com



RUBBER MAGNETIC SHEETS

RIGID MEDIA

EZ-Film Steel			
Product ID	Thickness (mm)	Size (meters)	Comments
CGFF-SP320	0.23	0.914,1.07,1.27, 1.37,1.524 x 20/30/50	PP Steel Film (without magnet effect)
CGFF-UP320	0.23	1.07,1.27,1.37, 1.524 x 20/30/50	

Isotropic Flexible Rubber Sheets

Product ID	Thickness (mm)	Size (meters)	Comments
CGMAG05-SAV	0.5	0.61 x 30	Single-sided multi poles magnetised with adhesive & Matt UV coating

Isotropic Flexible Rubber Magnetic

Product ID	Thickness (mm)	Size (meters)	Comments
CGMAG05x100x10-0	0.5	1.00 x 10	front side 0.1mm white matt PVC, backside UV coating
CGMAG06-065x10-0	0.6	0.65 x 10	front side 0.1mm white matt PVC, backside UV coating
CGMAG06-100x10-0	0.6	1.00 x 10	front side 0.1mm white matt PVC, backside UV coating
CGMAG09-065x10-0	0.9	0.65 x 10	front side 0.1mm white matt PVC, backside UV coating
CGMAG09-100x10-0	0.9	1.00 x 10	front side 0.1mm white matt PVC, backside UV coating

Isotropic Magnetic Inkjet Printable Paper

Product ID	Thickness (mm)	Size (meters)	Comments
CGMAG026-A4-M	0.26	DIN A4	White Matt
CGMAG026-A3-M	0.26	DIN A3	White Matt
CGMAG030-A4-G	0.30	DIN A4	White Gloss
CGMAG030-A3-G	0.30	DIN A3	White Gloss



info@gidke-ag.com www.gidke-ag.com